

1. GENERAL INFORMATION

1.1 Dealer Information

Dealer Name
Date (MM/DD/YY)
Address
City
Province/State
Postal Code
Email

1.3 Project

Purchase Order#
Contact
Phone
Ship To
City
Province/State
Postal Code

1.2 Shipping Information

Contact
Phone
Address
City
Province/State
Postal Code/ZIP

1.4 Type of Delivery

Residential Commercial
 Pick-Up Common Carrier
 Customer Arranged

Drawing Email

Initial Drawing Requested
 Approved for production as listed below

Wet Stamp Drawings (AL, AZ, AK, FL, GA, IL, IN, KS, LA, MD, MI, MS, MO, NY, NC, OH, PA, SC, TN, TX, VA)

2. BASICS

MODEL

500 lb.
 750 lb.

PLATFORM SIZE

36" W x 48" D
 36" W x 54" D

ENCLOSURES

Top Only
 Top w/ Plexi Side Enclosure
 None

BIFOLD CARRIAGE DOOR

No BiFold Carriage Door
 BiFold Carriage Door

CARRIAGE OPTIONS

Same Side Entry/Exit with Solid Lower Panels
 Same Side Entry/Exit w/ Picket Lower Panels
 Pass Through w/ Solid Lower Panels
 Pass Through w/ Picket Lower Panels

90° w/ Solid Lower Panels
 90° w/ Solid Lower Panels

NOTE: Picket includes a plexiglass skin

LANDINGS

2
 3

PASSTHROUGH ONLY

<h4>AUTO RAMP</h4> <p><input type="radio"/> Yes <input type="radio"/> No</p>	<h4>CAR GATE</h4> <p><input type="radio"/> RH <input type="radio"/> LH</p>	<p><input type="radio"/> Carriage Mounted Gate / Door <small>(Enclosed carriages get door and all other carriages get gates)</small></p> <p><input type="radio"/> BiFold Carriage Door <small>(Recommend Call/Send Station)</small></p> <p><input type="radio"/> For 3 Landing Unit <small>(Required wiring modification if Carriage Mounted Gate or Door Selected)</small></p>
<h4>DOOR FASCIA OPTIONS FOR PASSTHROUGH CARRIAGES</h4> <p><input type="radio"/> Door Fascia by Others <input type="radio"/> PLI Standard 48" Base</p>		
<h4>DOOR FASCIA EXTENSIONS FOR PASSTHROUGH CARRIAGES</h4> <p><input type="radio"/> No Extension <input type="radio"/> 24" <input type="radio"/> 48" <input type="radio"/> 72"</p>		

OUTDOOR ELEVATOR

3. TOWER

TOWER HEIGHT

- 18' (standard)
- 14' (if code requires)
- 18' - 25'

CONFIGURATION

As viewed from top landing

- Tower on Left
- Tower on Right

TOWER SPLICE

Powder Coated units require a tower splice every 90° of I-Beam

- No
- Yes

QTY:

TOWER SUPPORT

3 Landing requires 2 standoffs

- Standoff (pair)
- Triangle
- I-Beam w/standoffs





QTY:

QTY:

QTY:

TOWER FASCIA

- Solid Panel 
- Expanded Panel 

SAFETY PAN

- Yes
- No, Hoistway is enclosed

3. LOWER

- No Lower Door
 - Solid Lower
 - Picket
 - RH
 - LH
 - No Frame Extension
 - 24" Frame Extension
 - 48" Frame Extension
 - 72" Frame Extension
- (Based on Height to Lowest Eave)



24" : ADJUSTABLE HEADER AND (1) 24" X 41" DOOR FASCIA PANEL COVERS
ROUGH OPENING HEIGHT: 109"-133" / WIDTH: 42"

48" : ADJUSTABLE HEADER AND (1) 48" X 41" DOOR FASCIA PANEL COVERS
ROUGH OPENING HEIGHT: 133"-157" / WIDTH: 42"

72" : ADJUSTABLE HEADER AND (1) 72" X 41" DOOR FASCIA PANEL COVERS
ROUGH OPENING HEIGHT: 157"-181" / WIDTH: 42"

4. MIDDLE

- No Lower Door
- Solid Lower
- Picket
- RH
- LH



- No Frame Extension
 - 24" Frame Extension
 - 48" Frame Extension
 - 72" Frame Extension
- (Only for 3 Landing Elevator)

5. UPPER



DOOR (42" WIDE)

- No Lower Door
- Solid Lower
- Picket
- No Frame Extension
- 24" Frame Extension
- 48" Frame Extension
- 72" Frame Extension
- RH
- LH




UPPER GATE

- 36" (height) Upper Gate
- RH LH
- 42" (height) Upper Gate
- RH LH

- Solid 
- Picket 

SWING

- LH 
- RH

TOWER HEIGHT

	Standard	9' Extensions
<input type="radio"/> Door / Gate Wire	23'	QTY: <input type="text"/>
<input type="radio"/> Travel Cable	29'	QTY: <input type="text"/>
<input type="radio"/> Motor Wire	29'	QTY: <input type="text"/>

6. FINISH


- Mill Finish (no coating)
- Powder Coat - Gloss White
- Powder Coat - Almond
- Powder Coat - Grey

7. OPTIONS

- Float Switch
- Upgrade Door Fascia to clear Plexiglass
- Call / Send Station QTY:
- Additional Door Locks QTY:

ADDITIONAL INFORMATION


PLEASE FILL IN THE **TRAVEL DISTANCE & HEIGHT TO LOWEST EAVE** VALUES BELOW

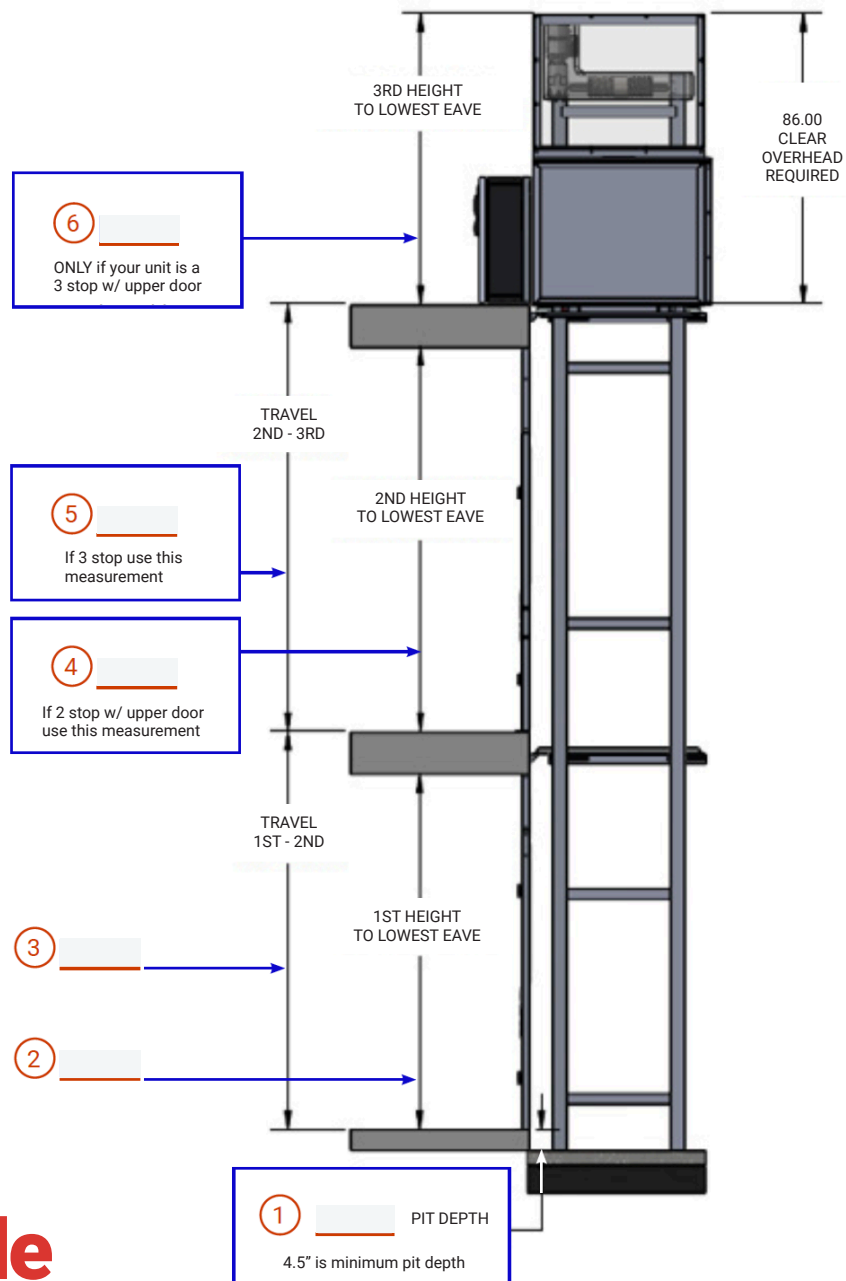


8. PIT OPTIONS

- Recessed Slab
- Recessed Footer
- No Pit / 6" I-Beam Door Base & Ramp
- No Pit / Ramp by Other
- No Pit / 6" I-Beam Door Base



REFER TO PLANNING GUIDE FOR CONCRETE AND REBAR SPECIFICATIONS

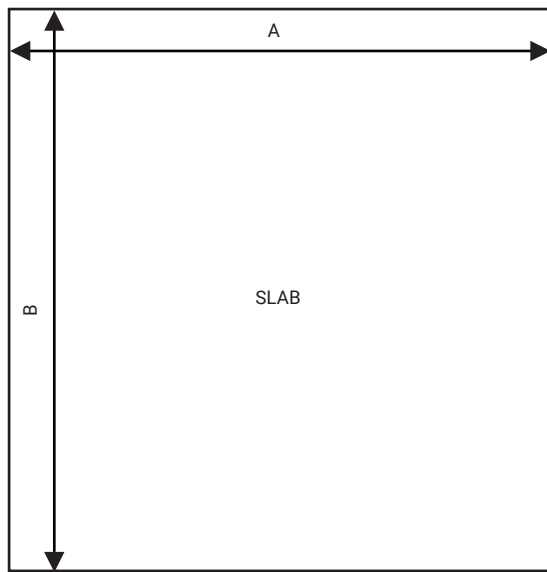

Front Entry Side

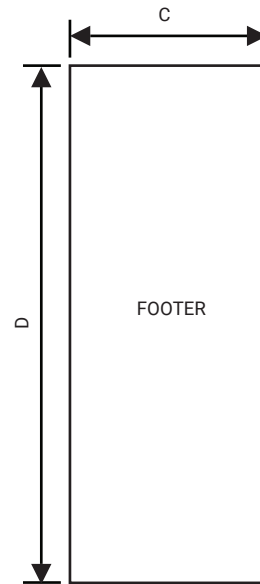

Front Entry Side

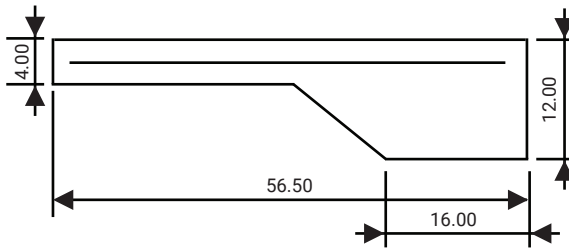

Carriage Width	Carriage Length	"A" Slab Width	"B" Slab Entrance	"B" Slab Through	"C" Footer Width	"D" Footer Width
36	48	56.50	58.50	54.25	18.00	54.00
36	54	56.50	64.50	60.25	18.00	60.00

9. PIT REQUIREMENTS

- All concrete to be reinforced with #3 rebar @ slab/footer mid-depth.
- 6" depression recommended from bottom floor to pit/slab/footer.
- Dimensions must meet or exceed minimum requirements listed above.

10. ELECTRICAL REQUIREMENTS

THE CONTROLLER COMES EQUIPPED WITH A 120VAC PLUG/PIGTAIL & REQUIRES A DEDICATED NON GFCI CIRCUIT, 120VAC, 20AMP OUTLET WITHIN SIGHT OF THE LIFT. FOR JURISDICTIONS WHICH REQUIRE THE CONTROLLER TO BE HARDWIRED, CUT CORD END AND HARD WIRE INTO APPROPRIATE DISCONNECTING MEANS. CORD MAY ALSO BE REMOVED AND REPLACED WITH APPROPRIATE WIRE SUPPLIED BY OTHERS.

THE VVFD VARIABLE FREQUENCY DRIVE PROVIDES THE GROUND FAULT CIRCUIT INTERRUPTION (GFCI) FOR THE EQUIPMENT AND WILL NOT RUN ON A GFCI PROTECTED SUPPLY CIRCUIT.